



Submersible vortex drainage pump fitted with cast iron semi vortex impeller. Can pump particles up to 25mm.

Pump Characteristics:

- Cast iron pump body and impeller for durability
- Fully automatic operation by means of float switch.
- Triple seal system: Dual Mechanical Seal (carbon/ceramic) and oil seal
- Handy carry handle
- Universal hose tail adaptor
- 240V single phase motor with built-in thermal overload protection
- 10m power cable, H07RN-F.
- For use with clean or slightly dirty water, dewatering cellars, storm-water pit emptying, dirty water with non-abrasive solids (up to 25mm dia.) and stringy material in suspension.
- Pumping clean or slightly dirty water
- Max flow 200 L/min
- Max head 8.5 m

Liquid:

Clean water temperature range: 2 – 35 °C

Materials:


Pump body:	Cast Iron
Impeller:	Cast iron
Shaft:	Stainless Steel
Shaft seal:	Dual mechanical seal - carbon/ceramic and oil seal

Installation:

Maximum ambient temperature:	40 °C
Pipe connections discharge:	2"

Electrical data:

Rated voltage:	240V
Mains frequency:	50 Hz
Rated output:	450W
Current:	3.7 amps
Capacitor:	15 uF
Motor duty:	Continuous
Motor type:	Asynchronous
Motor protection:	In-built thermal overload
Ingress protection:	IP 68
Insulation class:	B
Power cable length:	10 m H07RNF
Net weight:	19 kg

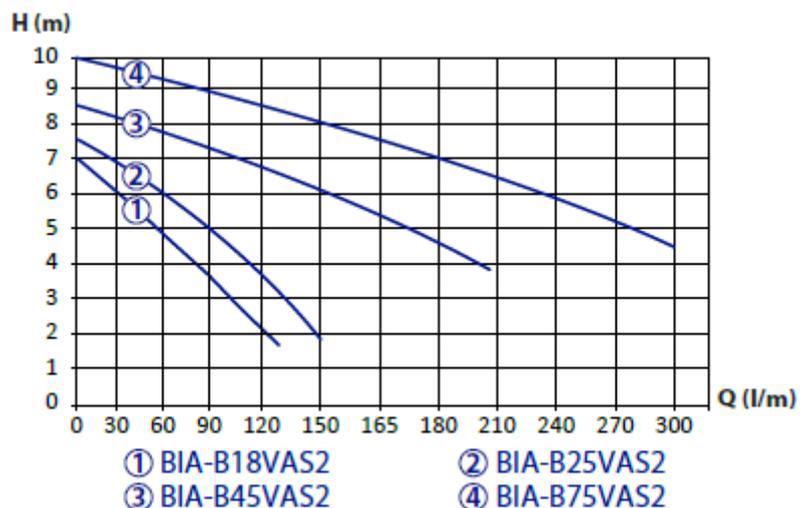

2 Year Bianco Pumpz Warranty