



Submersible drainage pump fitted with cast iron semi vortex impeller.

Can pump particles up to 25mm.

Pump Characteristics:

- Cast iron pump body and impeller for durability
- Fully automatic operation by means of float switch
- Triple seal system: Dual mechanical seal - carbon/ceramic, and oil seal
- Handy carry handle
- Hose tail adaptor included
- 240V single phase motor with built-in thermal overload protection.
- 10m power cable, H07RN-F.
- For use with clean or slightly dirty water, dewatering cellars, storm-water pit emptying, dirty water with non-abrasive solids (up to 25mm dia) and stringy material in suspension.
- Max flow 300 L/min
- Max Head 10 m

Liquid:

Clean water temperature range: 2 – 35 °C

Materials:


- Pump body: Cast Iron
- Impeller: Cast iron
- Shaft: Stainless Steel
- Shaft seal: Dual mechanical seal - carbon/ceramic and oil seal

Installation:

- Maximum ambient temperature: 40 °C
- Pipe connections discharge: 2"

Electrical data:

- Rated voltage: 240V
- Mains frequency: 50 Hz
- Rated output: 750W
- Current: 5.3 amps
- Capacitor: 20 uF
- Motor duty: Continuous
- Motor type: Asynchronous
- Motor protection: Built-in thermal overload
- Ingress protection: IP 68
- Insulation class: B
- Power cable length: 10 m H07RNF
- Net weight: 21 kg

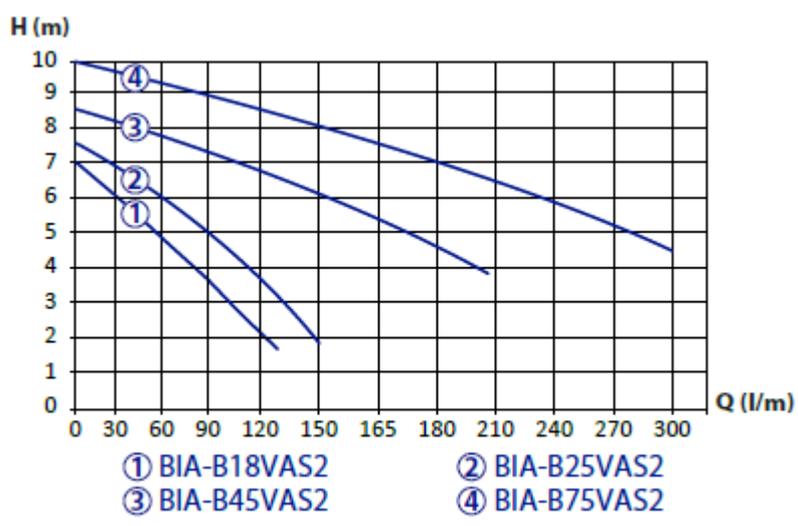

2 Year Bianco Pumpz Warranty