


ESR2-T5

Undersink UV Filter System with Tripla™ T5 Mixer Tap

RAINWATER

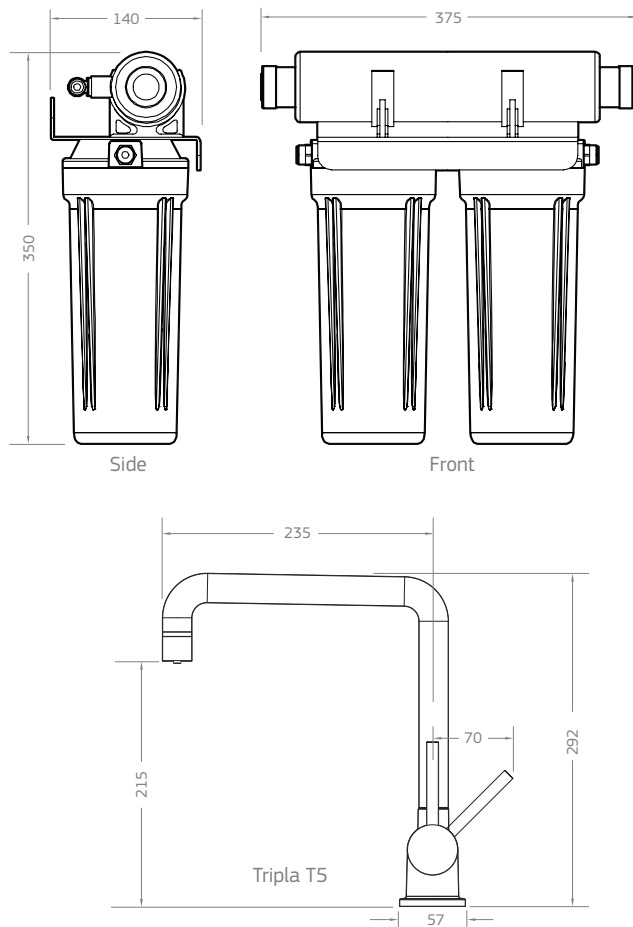

Note: All dimensions are in mm.

Parts Included



Specifications

Ordering Code	Temp °C	Pressure** (kPa)	Flow (Lpm)	Micron Rating*	Connection	Cartridge Size
ESR2-T5	0-52	300-500	5	1	1/2" (15 mm)	10"
Tripla™ T5	0-60	50-500	5	-	1/2" and 1/4" braided hose	

REPLACEMENT PARTS AND CARTRIDGES

Code	Stage 1 Cartridge	Stage 2 UV R500 Lamp	Quartz Sleeve	Stage 3 Cartridge
ESR2	PL051	RL2 (287mm)	RQ52 (330mm)	MC011-S

Notes: Tap Wels Rating - 5 Stars. Required Tap Hole - 33mm. Lamp life is 12,000 hours or approximately 16 months. All UV systems require pre-filtration to at least 10 micron. 220-240 VAC / 50 Hz Voltage. Protect from freezing.

ESR2 FILTRATION TECHNOLOGY

STAGE 1	- Filters the finest particles - Clarifies the water - Reduces sediment, rust, sand, silt and algae
STAGE 2 (ultraviolet technology)	Kills harmful microorganisms including E.coli, Cryptosporidium and Giardia cysts
STAGE 3	- Filters harmful bacteria - Silver impregnated to prevent bacterial growth - Removes* bad taste and odour

Warranty: Tripla warranty^ is 1 year parts and labour, plus 5 years parts only. ESR2 Filter System warranty^ is 1 year parts and labour, plus 5 years parts only. Excludes cartridges. Use only genuine Puretec replacement cartridges.



Warning: Please visit www.puretec.com.au/instructions to observe essential manufacturer's instructions before use. **Note:** No claims can be made based on the specifications and images in this document. The design, technology, colours, features and prices are subject to change. This document and all its contents are copyright protected. All rights are reserved, particularly alteration, translation and reproduction using electronic systems. **Where line pressure exceeds 520kPa, an approved pressure limiting device must be installed to comply with Australian & New Zealand Plumbing Standards. (Ref. AS 35001:2021, Clause 3.3.4). **Caution:** Do not use with microbiologically unsafe water or water of unknown quality without adequate disinfection before or after the system. Puretec UV systems are designed for common rainwater. The effectiveness of a UV system is dependent on the clarity of water present. If you are unsure of the clarity of your water Puretec can arrange a UV test to verify that no further filtration is required before the UV. Contact Puretec on 1300 140 140 (AU) or 0800 130 140 (NZ) for further information on this Warranty. *Warranties in this document cover parts for the period stated and include cover for parts and labour for the first year where applicable, subject to approval. Excludes consumables. This spec sheet has been designed to help make product selection easy. However due to the complex nature of water chemistry, we strongly encourage confirming any product selection with one of our team. We may need to perform a water analysis test to confirm contaminants in water. Our Water Filtration Specialists can provide you with advice to suit your needs. *Micron rating is nominal. *The term 'removal' or 'removes' indicates significant reduction, not necessarily 100% removal.

OCT 2024

For more information contact your local stockist or visit us at puretecgroupp.com
Australia **1300 140 140** | New Zealand **0800 130 140**

