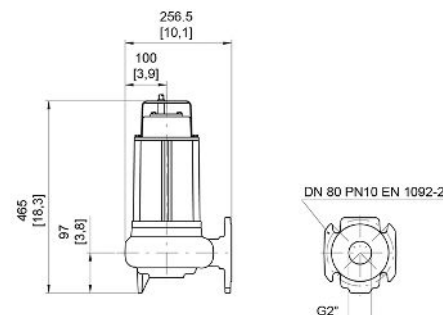
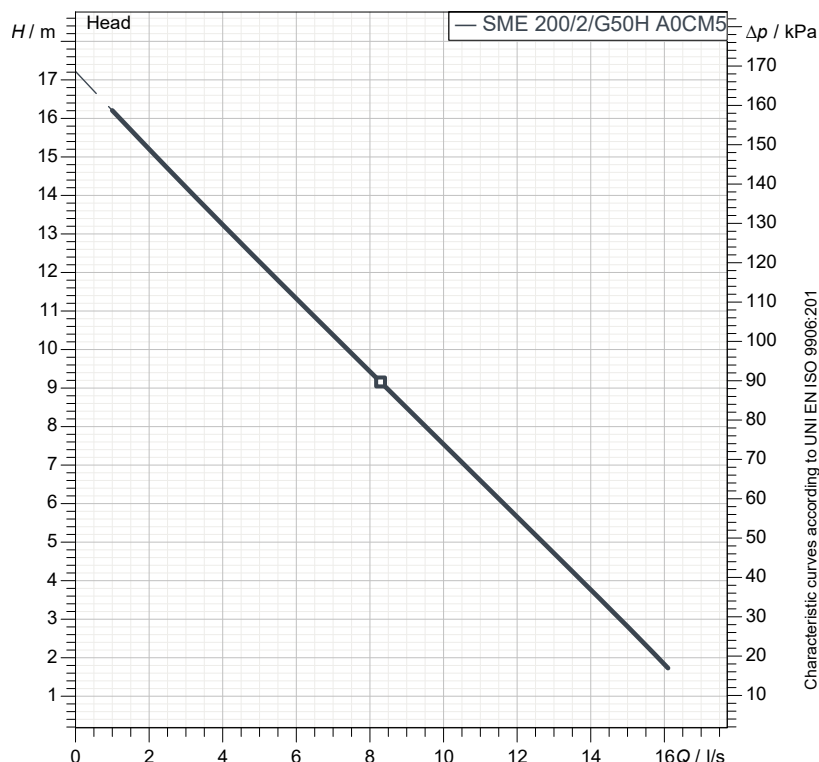


Technical specification

1~ 50 Hz


[mm]
[inch]

Pump

Series	E series
Pump name	SME 200/2/G50H A0CM5
Configuration	NGTCQ21023N00NN
Standard	EN 809:2009

Motor data

Rated voltage	230 V
Frequency	50 Hz
Motor phases	1~
Number of poles	2
Rated power P2	1.5 kW
Incoming power P1	1.8 kW
Rated current	9.3 A
rpm	2900 1/min
cos φ	0.85
Rated torque	4.9 Nm
Start	
Degree of protection	IP 68
Insulation class	F

Hydraulic

Type	SM (Single-channel closed impeller)
Free passage	50 mm
Impeller type	Closed channel impeller
Discharge	DN 80 - G2" EN 1092-2
Curve tolerance	UNI EN ISO 9906:2012

Operating limits (standard pumps)

Max. ambient temperature	40 °C
Max. density treated liquid	1100 kg/m³
pH treated liquid	6 ÷ 14
Max. start per hour (equally distributed)	30
Wet/dry use	WET
Max. acoustic pressure level	70 dB
Operating mode	S1 - Continuous use

Construction materials

Case	Cast iron EN-GJL 250
Shaft	Stainless steel AISI 431
Hydraulic	Cast iron - EN-GJL 250
Impeller	Cast iron - EN-GJL 250
Painting/Coating	Bi-epoxy 120 μm
Screws	Stainless steel - Class A2-70
Gaskets	NBR

Construction features


Main cable	3G1
Control cable	-
Cable length	10 mt
Mechanical seals	1 in silicon carbide and 1 lip seal
Additional drilling	-
Weight*	31 kg
Electrical variant	Thermal protection and capacitor

* cable and fixing system excluded

Pump performance curves

1~ 50 Hz

Hydraulic type SM (Single-channel closed impeller)	Impeller type Closed channel impeller	Free passage 50 mm	Discharge DN 80 - G2"	Suction -
DUTY POINT				
Flow	Head	Shaft power P2	Hydraulic efficiency	Density 998.3 kg/m ³
				Viscosity 1.005 mm ² /s

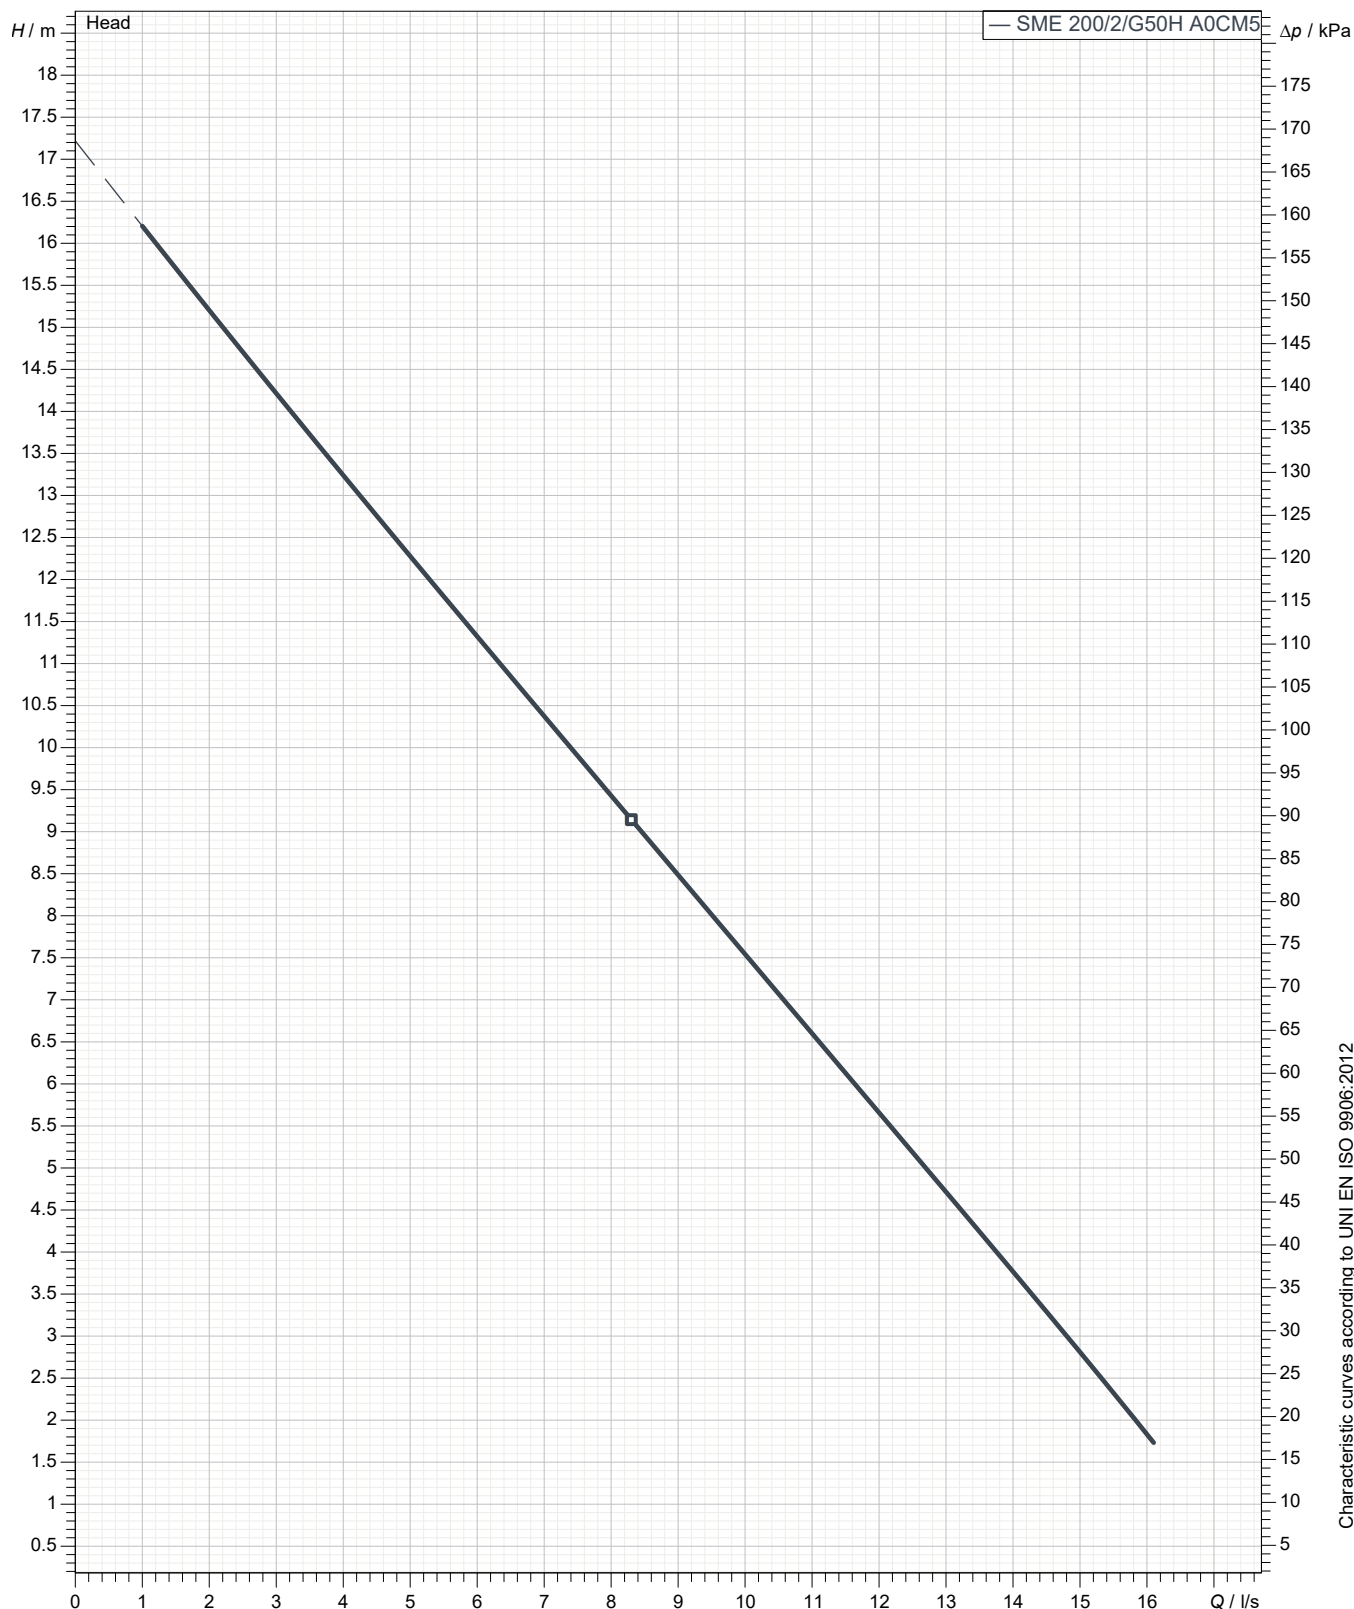

Characteristic curves according to UNI EN ISO 9906:2012
P2<10kW: paragraph 4.4.2
10kW<P2<100kW: Grade 3B
P2>100kW: Grade 2B

