

Qty. Description

1 UNILIFT AP12.40.04.3



Note! Product picture may differ from actual product

Product No.: [96011024](#)

Submersible drainage pump type

Vertical single-stage stainless steel submersible pump with vertical discharge port and integrated submersible 3-phase totally enclosed motor in insulation class F. The pump is fitted with a suction strainer.

The impeller is a SEMI OPEN impeller for groundwater, surface water, rain water and similar.

The pump has a double shaft seal and an intermediate oil chamber pre-filled with non-toxic special oil.

The pump has a riser pipe, a cooling jacket for continuous cooling of the motor by the pumped liquid and long-life deep-groove greased-for-life ball bearings.

The pump is ready for use as it is fitted with carrying handle and is supplied with a 10 m mains cable. The mains cable is of the plug type with glass sealing compound in the socket to prevent penetration of humidity into the stator windings.

Liquid:

Liquid temperature range: 0 .. 55 °C

Density: 998.2 kg/m³

Technical:

Maximum flow: 3.89 l/s

Type of impeller: SEMI OPEN

Max. Particle: 12 mm

Approvals: CE,RCM,VDE,LGABG,EAC,TUVRHWD,MORO,UKCA,CNROHSEXP,SEPRO

Rated speed: 2800 rpm

Materials:

Pump housing: Stainless steel

EN 1.4301

AISI 304

Impeller: Stainless steel

EN 1.4301



Company name: ASC Water Tanks
Created by: Anant Yuvarajah
Phone: 03 8795 7715
Email: anant@asctanks.com.au
Date: 8/30/2023



Qty. Description

1	AISI 304
Cable union:	Brass
	CW602N
	C35330
Installation:	
Range of ambient temperature:	0 .. 55 °C
Type of connection:	Rp
Size of connection:	1 1/2 inch
Maximum installation depth:	7 m
Place of installation:	Indoor/outdoor
Electrical data:	
Power input P1:	0.7 kW
Rated power - P2:	0.4 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 400 V
Rated current:	1.2 A
Cos phi - power factor:	0.83
Rated speed:	2800 rpm
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	F
Length of power cable:	10 m
Type of cable plug:	NONE
Others:	
Net weight:	10.8 kg
Gross weight:	12 kg
Danish VVS No.:	391314101
Swedish RSK No.:	5885774
Finnish LVI No.:	4822513
Country of origin:	HU
Custom tariff no.:	8413709062
Environmental approvals:	WEEE








Company name: ASC Water Tanks
Created by: Anant Yuvarajah
Phone: 03 8795 7715
Email: anant@asctanks.com.au
Date: 8/30/2023



96011024 UNILIFT AP12.40.04.3 50 Hz

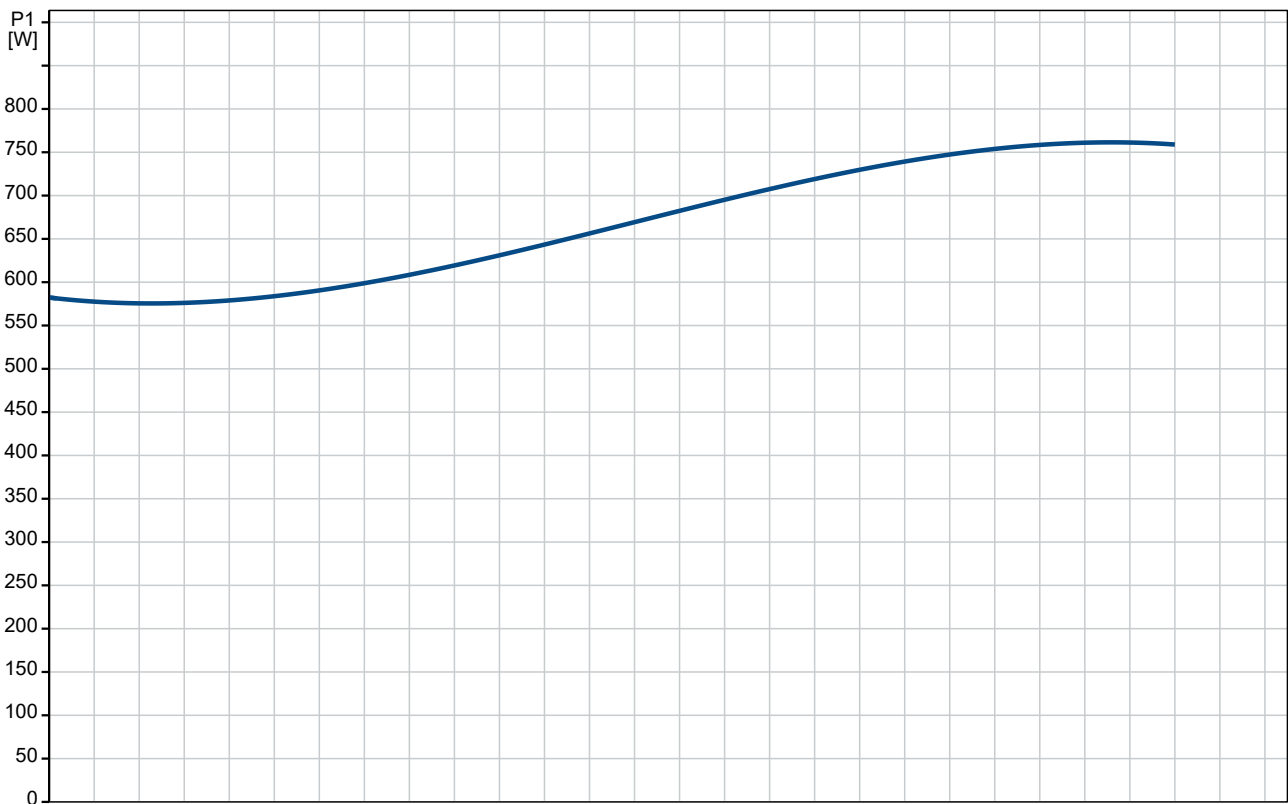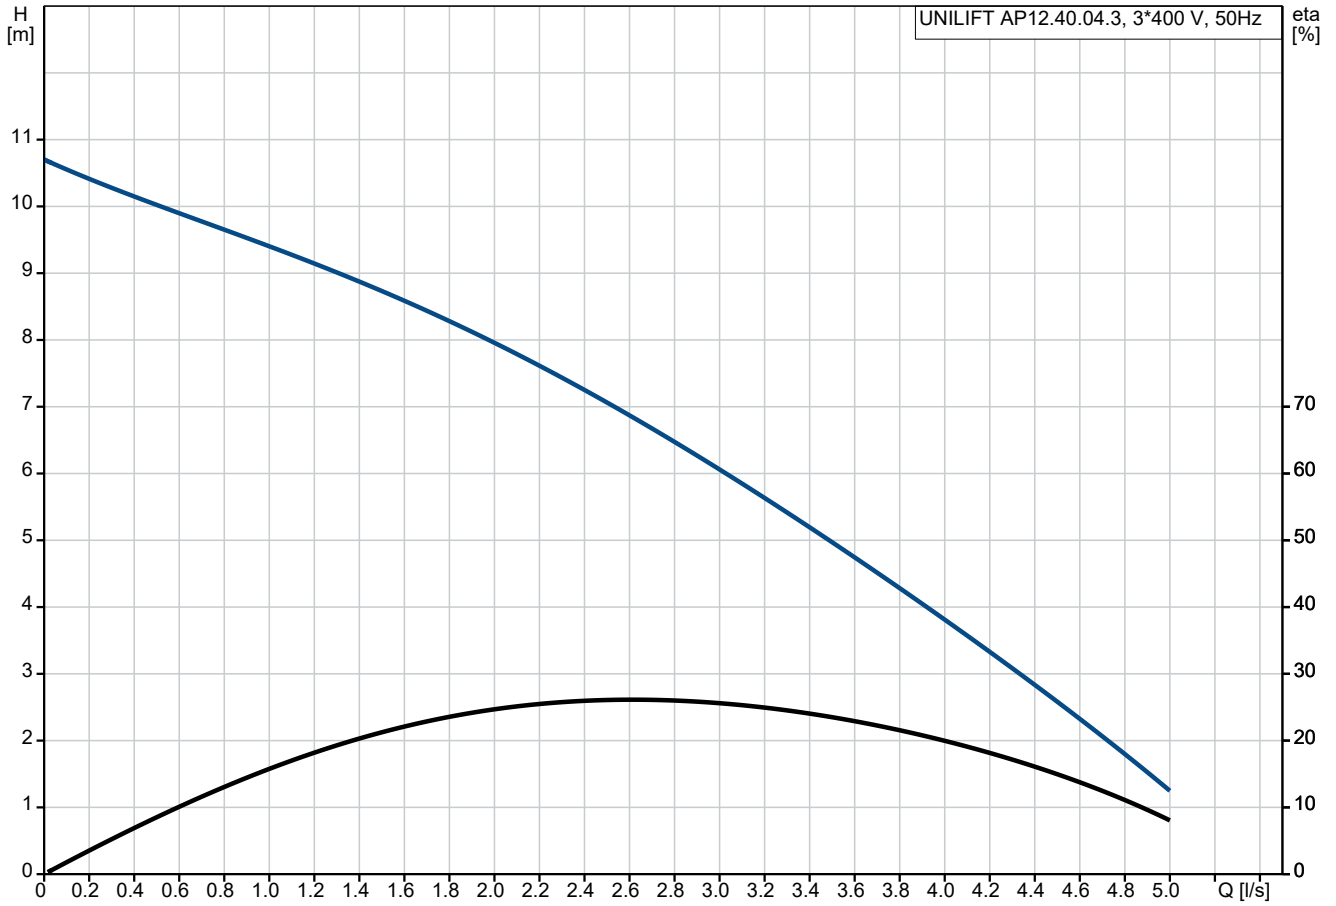

Description	Value
General information:	
Product name:	UNILIFT AP12.40.04.3
Product No:	96011024
EAN number:	5700390901608
Price:	AUD 939
Technical:	
Maximum flow:	3.89 l/s
Maximum head:	10 m
Type of impeller:	SEMI OPEN
Max. Particle:	12 mm
Approvals:	CE,RCM,VDE,LGABG,EAC,TUV RHWID,MORO,UKCA,CNROHSE XP,SEPRO
Rated speed:	2800 rpm
Materials:	
Pump housing:	Stainless steel
Pump housing:	EN 1.4301
Pump housing:	AISI 304
Impeller:	Stainless steel
Impeller:	EN 1.4301
Impeller:	AISI 304
Cable union:	Brass
Cable union:	CW602N
Cable union:	C35330
Installation:	
Range of ambient temperature:	0 .. 55 °C
Type of connection:	Rp
Size of connection:	1 1/2 inch
Maximum installation depth:	7 m
Inst dry/wet:	D/S
Installation:	horizontal or vertical
Place of installation:	Indoor/outdoor
Liquid:	
Liquid temperature range:	0 .. 55 °C
Density:	998.2 kg/m ³
Electrical data:	
Power input P1:	0.7 kW
Rated power - P2:	0.4 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 400 V
Rated current:	1.2 A
Cos phi - power factor:	0.83
Rated speed:	2800 rpm
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	F
Built-in motor protection:	NONE
Thermal protec:	external
Length of power cable:	10 m
Type of cable plug:	NONE
Others:	
Net weight:	10.8 kg
Gross weight:	12 kg
Danish VVS No.:	391314101
Swedish RSK No.:	5885774
Finnish LVI No.:	4822513
Country of origin:	HU
Custom tariff no.:	8413709062
Environmental approvals:	WEEE

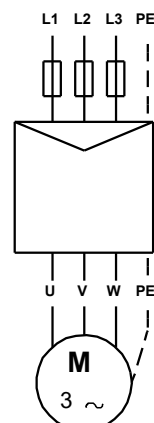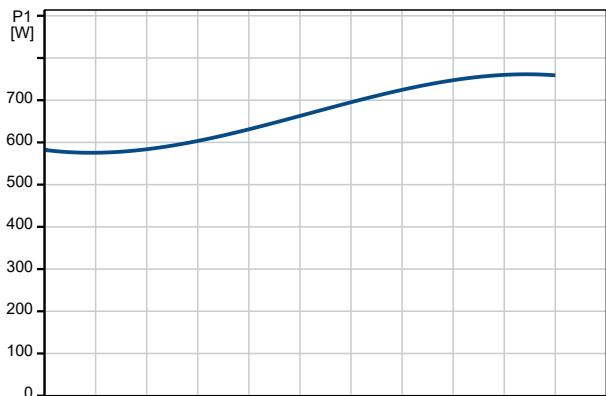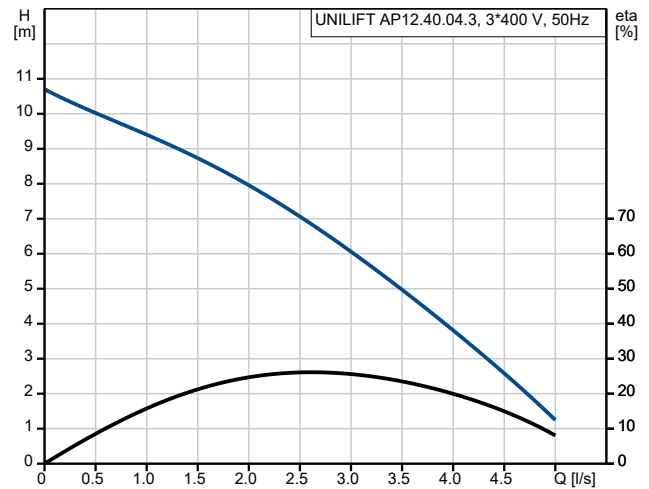

96011024 UNILIFT AP12.40.04.3 50 Hz

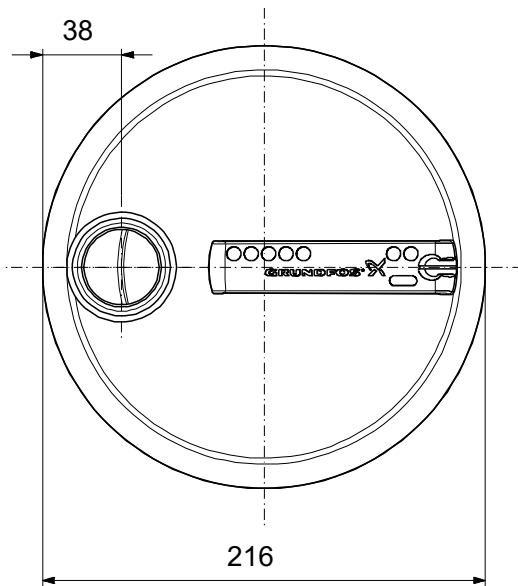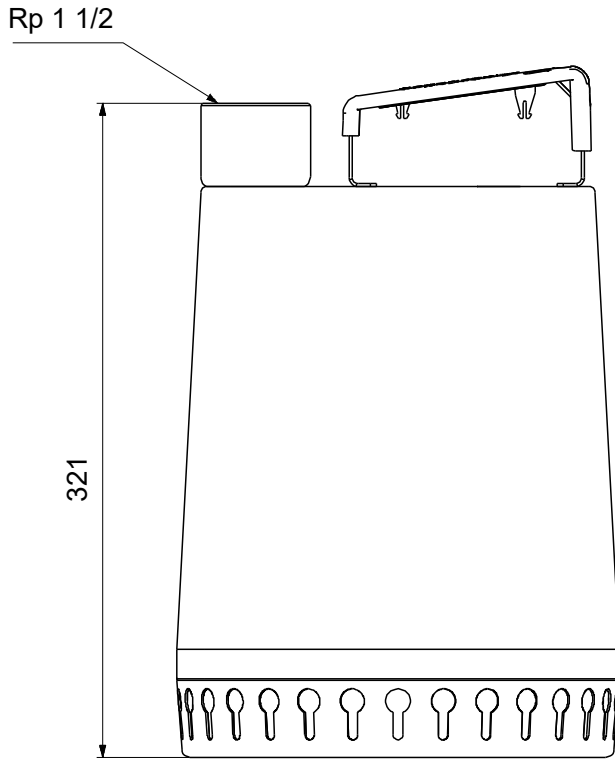

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.