

Introducing Waterguard,  
Australia's only antimicrobial  
poly rainwater tank!

Creating fresher,  
cleaner water for you  
and your family



Reduces  
Odours



Reduces  
Bacteria



Antimicrobial  
Water Tank

Regular Untreated  
Water Tank

\* For illustrative purposes only



6 Star  
Energy Rating



Safely Treated  
with Antimicrobial  
Technology



Better for the  
Environment



Australian  
Made



BPA FREE

Partnering with global leaders  
SANITIZED AG, our new Waterguard  
rainwater tanks are infused with  
Sanitized® antimicrobial protection.  
Organic matter such as algae, mould

and mildew can build-up inside your  
tank, which can make it dirty, and  
can contaminate your rainwater. Our  
antimicrobial treatment actively protects  
against this, keeping your family safe

from harmful bacteria and extending the  
life of your tank.

Visit [www.polymaster.com.au/  
waterguard](http://www.polymaster.com.au/waterguard) for details


#### WATERGUARD IS AVAILABLE ON THE FOLLOWING TANK RANGES



##### SLIMLINE RAINWATER TANKS

→ 2000L – 3000 litres

→ See pg.14-15 for tank information

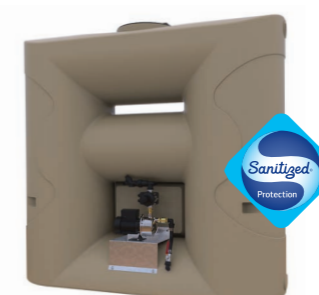

##### 2020L TANK & PUMP PACKAGE

→ See pg.16-17 for tank information




##### ROUND RAINWATER TANKS

→ 200 - 9000 litres

→ See pg.6-7 & pg.12-13 for tank information

#### COLOUR RANGE

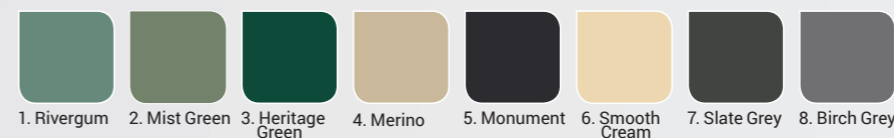

1. Rivergum 2. Mist Green 3. Heritage Green 4. Merino 5. Monument 6. Smooth Cream 7. Slate Grey 8. Birch Grey



## Small Tanks

- Waterguard Tanks **NEW**
- Small Round Tanks 200-7,000ltr
- Slimline Tanks
- Tank & Pump Packages
- Tank Accessories

“ We are very pleased with the choice we made to go with Polymaster due to the quality and excellent service. We will endeavour to use more Polymaster tanks as we continue to upgrade our property.

- Matthew, Bridgewater SA

” 02

# Small Round Tanks 200-7,000ltr

ALL TANKS ARE CERTIFIED TO THE RAINWATER TANK STANDARD AS/NZS4766:2006



## CERTIFIED

- Self-supporting roof design means no support poles are necessary
- Extra thick walls for maximum strength
- One-piece construction means there are no joins, seams or part-lines
- Specially formulated double strength UV+ resin on the complete colour range ensures ultimate protection against Australia's harsh sun
- RWT range available in 22 Colorbond® colours
- PCR range available in 12 Standard Colorbond® colours - Other colours available on request at 5% surcharge

Pages 5-9  
**LARGE TANKS**

Page 11  
**WATERGUARD TANKS**

Pages 18-19  
**COLOUR RANGE**

Pages 82-83  
**DELIVERY & INSTALLATION**

ONLINE WATER CALCULATOR

CALCULATOR.  
POLYMASTER.COM.AU



WHY CHOOSE POLYMASTER?  
SEE PG.4



## RWT - RAINWATER TANKS (CORRUGATED & SMOOTH WALL)

CODE	LITRES	DIAMETER	INLET HEIGHT	OVERALL HEIGHT	STRAINER (POSITION, SIZE)	OVERFLOW (ALTERNATIVE)	OUTLET (Std) (POSITION, SIZE)
RWT200	200 (45gal)	600 mm (2')	900 mm (2'11")	900 mm (2'11")	Centre, 200 mm	12	6, 25 mm
RWT600	600 (110gal)	1000 mm (3'3")	950 mm (3'1")	950 mm (3'1")	Centre, 200 mm	12	6, 25 mm
RWT1000	1000 (220gal)	1000 mm (3'3")	1500 mm (4'11")	1500 mm (4'11")	Centre, 200 mm	12	6, 25 mm
RWT1600	1600 (350gal)	1250 mm (4'1")	1500 mm (4'11")	1610 mm (5'3")	12, 300 mm	11 / 4	6, 25 mm
RWT2270T	2270 Tall (500gal)	1300 mm (4'3")	1920 mm (6'4")	2000 mm (6'6")	12, 300 mm	11 / 5	6, 25 mm
RWT2270LP	2270 Low Profile (500gal)	1700 mm (5'8")	1200 mm (4')	1310 mm (4'3")	12, 400 mm	11 / 4	6, 25 mm
RWT3300	3300 (730gal)	1520 mm (5')	2000 mm (6'6")	2100 mm (6'10")	12, 300 mm	11 / 4	6, 25 mm
RWT4500T	4500 Tall (1000gal)	1700 mm (5'8")	2100 mm (6'11")	2200 mm (7'3")	12, 400 mm	11 / 4	6, 25 mm
RWT4500LP	4500 Low Profile (1000gal)	2150 mm (7'2")	1380 mm (4'6")	1580 mm (5'2")	12, 400 mm	11 / 3 / 7	6, 25 mm
RWT5000	5000 (1100gal)	1950 mm (6'5")	1960 mm (6'5")	2170 mm (7'2")	12, 400 mm	11 / 3 / 7	6, 25 mm
RWT7100	7100 (1500gal)	2150 mm (7'2")	2120 mm (7')	2300 mm (7'5")	12, 400 mm	11 / 3 / 7	6, 40 mm

AVAILABLE IN WATERGUARD - New technology to keep your water fresher for longer.

CODES: WGRWT200 / WGRWT600 / WGRWT1000 / WGRWT1600 / WGRWT2270T / WGRWT2270LP / WGRWT3300 / WGRWT4500T / WGRWT4500LP / WGRWT5000 / WGRWT7100

\* Refer to the RWT codes above for tank dimensions



- See pg.11 for Waterguard info.


## PCR - RAINWATER TANKS (SMOOTH WALL)

CODE	LITRES	DIAMETER	INLET HEIGHT	OVERALL HEIGHT	STRAINER (POSITION, SIZE)	OVERFLOW (ALTERNATIVE)	OUTLET (Std) (POSITION, SIZE)
PCR2000	2000 (440gal)	1175 mm (3'11")	2185 mm (7'2")	2255 mm (7'4")	12, 300 mm	10.30/1.30/4.30/7.30	6, 25 mm
PCR4000	4000 (880gal)	1600 mm (5'2")	2150 mm (7'1")	2200 mm (7'2")	12, 400 mm	10.30/1.30/4.30/7.30	6, 25 mm
PCR5000	5000 (1100gal)	1800 mm (5'11")	2120 mm (7')	2200 mm (7'2")	12, 400 mm	10.30/1.30/4.30/7.30	6, 25 mm
PCR7000	7000 (1500gal)	2200 mm (7'2")	2020 mm (6'6")	2200 mm (7'2")	12, 400 mm	10.30/1.30/4.30/7.30	6, 25 mm


## TANK ROOF DIAGRAM FOR FITTING POSITIONS

Please see table and diagram to choose your preferred overflow and outlet positions.

Brass outlets can be placed anywhere on flat skirt of tank.

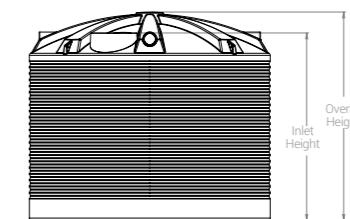

## FIT-OUT CLOCK

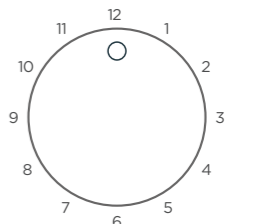

\* Refer to table for strainer, overflow & outlet positions available for each tank size

## ROUND TANK STANDARD FITTINGS



\* Additional sizes available

All measurements are approximate due to variable shrinkage during manufacture. Due to pigment variations with raw material manufacturers, colour shades may vary. Polymaster takes no responsibility for the quality of water held in a tank. \*Free delivery only applies to some regions and tank sizes.

# Slendastyle™ Tanks

THE SLENDASTYLE™ RANGE PROVIDES SLIM-PROFILE WATER STORAGE OPTIONS UP TO 5000L.



## CERTIFIED

- Space saving modern design ideal for tight spaces
- Hand grips for easy lifting
- Can be coupled to other tanks for even greater volume
- 22 Colorbond® colours to match your home!



Pages 18-19  
**COLOUR RANGE**

Pages 82-83  
**DELIVERY & INSTALLATION**

ONLINE WATER CALCULATOR

CALCULATOR.  
POLYMASTER.COM.AU



WHY CHOOSE POLYMASTER?

SEE PG.4

## PUMP OPTIONS

\* 2 years warranty on pumps

### 1 SUBMERSIBLE PUMP SYSTEM

- High volume/pressure stainless steel submersible pump suitable for single-storey and double-storey dwellings
- Automatic switching device fitted for rain to mains automatic changeover with no water supply interruption



### 2 PACKAGED PUMP UNIT

- Sits neatly beside any size tank and includes a pump, protected in a poly pump house - for house amenities supply



→ PH400 OR PH550

### 3 40LPM GARDEN PUMP SYSTEMS

- Constant pressure controller for ease of watering & garden supply



**POLYCHOICE**

## COST-EFFECTIVE SOLUTION

- Modern slim design perfect for small urban spaces
- Australian Standards AS4766:2006
- Available in 12 standard colours
- 7 years warranty for your peace of mind
- 2000L tank fits through a standard doorway

\*5% surcharge on the optional colour range



The Slendastyle™ rainwater tanks have been designed to hold the maximum volume of water for the minimum surface area used.

## SLENDASTYLE TANKS

CODE	LITRES	DIMENSIONS (mm)	OVERFLOW POSITION	OUTLET POSITION	SIEVE POSITION
SLST600	600 (130 gal)	1220L x 580W x 1265H	12:00 Std /6:00 Alt	6:00 Std /12:00 Alt	6:00 Std /12:00 Alt
SLST1050	1050 (230 gal)	1460L x 690W x 1515H	12:00 Std /6:00 Alt	6:00 Std /12:00 Alt	6:00 Std /12:00 Alt
SLST2000	2000 (440 gal)	2370L x 600W x 2010H	12:00 Std /6:00 Alt	6:00 Std /12:00 Alt	6:00 Std /12:00 Alt
SLST3000	3000 (660 gal)	2570L x 790W x 2050H	12:00 Std /6:00 Alt	6:00 Std /12:00 Alt	6:00 Std /12:00 Alt
SLST5000	5000 (1100 gal)	3290L x 1020W x 2010H	12:00 Std /6:00 Alt	6:00 Std /12:00 Alt	6:00 Std /12:00 Alt

## WITH OPTION 1 - SUBMERSIBLE PUMP

CODE	DESCRIPTION
SLST1050AP	1050 ltr Tank + Submersible Pump
SLST2000AP	2000 ltr Tank + Submersible Pump
SLST3000AP	3000 ltr Tank + Submersible Pump
SLST5000AP	5000 ltr Tank + Submersible Pump

## WITH OPTION 3 - GARDEN PUMP

CODE	DESCRIPTION
SLST1050GPS	1050 ltr Tank + Garden Pump
SLST2000GPS	2000 ltr Tank + Garden Pump
SLST3000GPS	3000 ltr Tank + Garden Pump
SLST5000GPS	5000 ltr Tank + Garden Pump

Please specify which pump system you require at time of order.

## AVAILABLE IN WATERGUARD

- New technology to keep your water fresher for longer.

CODES: WG2000 / WG3000 / WG5000

\* Refer to the SLST codes above for tank dimensions




- See pg.11 for Waterguard info.

## SLENDASTYLE TANK STANDARD FITTINGS




Leaf & mosquito proof mesh screen




Large 90mm Overflow



25mm Solid Brass Outlet & Ball Valve [SLST Range]



25mm Solid Brass Outlet [PCST Range]

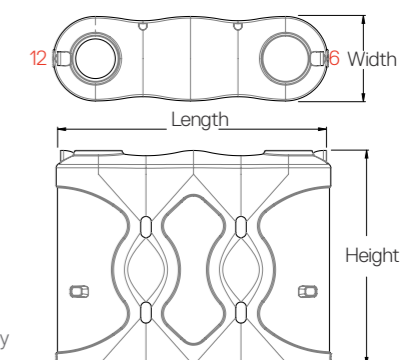

All measurements are approximate due to variable shrinkage during manufacture. Due to pigment variations with raw material manufacturers, colour shades may vary. Polymaster takes no responsibility for the quality of water held in a tank. \*Free delivery only applies to some regions and tank sizes.

## POLYCHOICE SLIMLINE TANKS

CODE	DIMENSIONS (mm)	CAPACITY	OVERFLOW POSITION	OUTLET POSITION, SIZE	SIEVE POSITION
PCST2000	2370L x 600W x 2010H	2000 ltr (440 gal)	12:00 Std/6:00 Alt	6:00 Std/12:00 Alt, 25mm	6:00 Std/12:00 Alt
PCST3000	2570L x 790W x 2050H	3000 ltr (660 gal)	12:00 Std/6:00 Alt	6:00 Std/12:00 Alt, 25mm	6:00 Std/12:00 Alt

## WITH OPTION 1 - SUBMERSIBLE PUMP

CODE	DESCRIPTION
PCST2000AP	2000 ltr tank + Submersible Pump
PCST3000AP	3000 ltr tank + Submersible Pump

# 2020L Slimline Tank

ACHIEVE A 6 STAR ENERGY RATING WITH OUR 2020L TANK & PUMP COMBINATION ON NEW HOME BUILDS



\* Tank Only \* 2 years warranty on pump

Pages 18-19  
**COLOUR RANGE**

Pages 82-83  
**DELIVERY & INSTALLATION**

**ONLINE WATER CALCULATOR**

CALCULATOR.  
POLYMASTER.COM.AU



**WHY CHOOSE POLYMASTER?**  
SEE PG.4



6 Star energy rating



Easy to install  
in 10 minutes




Reduce connection  
time to less than  
10 mins

**Connects  
directly to  
house**

**Install faster with our NEW 2020 tank with built-in pump to reduce connection time to less than 10 mins**

- Quick To Install
- Built-in Pump
- Save On Connection
- Reliable
- Built Tuff
- Fits through tight doorways

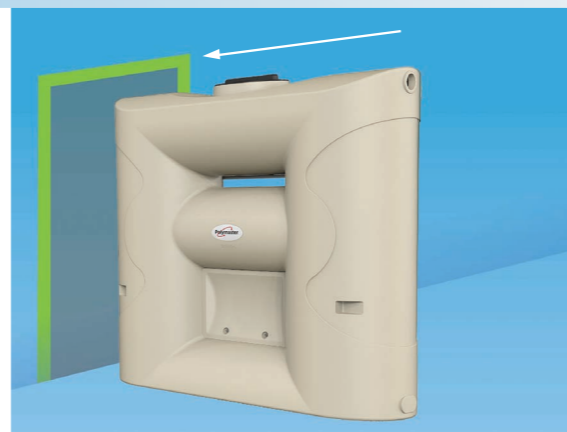

## TANK & PUMP COMBINATION

CODE	TANK DESCRIPTION	DIMENSIONS	PUMP WITH RAIN/MAINS CHANGEOVER DEVICE
BSLT2020H4	2020L Tank & Pump	735W X 2105L X 2010H	Hyjet 370 watt pump for single storey dwellings
BSLT2020H5	2020L Tank & Pump	735W X 2105L X 2010H	Hyjet 550 watt pump for multi storey dwellings

## AVAILABLE IN WATERGUARD

- New technology to keep your water fresher for longer.

CODES: WG2020H4, WG2020H5

\* Refer to the BSLT codes above for tank dimensions




- See pg.11 for Waterguard info.

## COLOUR RANGE



\* Optional colours available on 5% surcharge

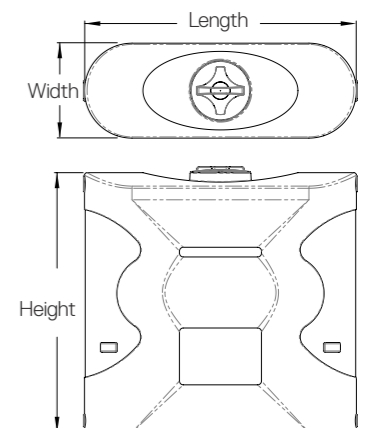

## 2020L SLIMLINE TANK SHOWING STANDARD FITTINGS



Leaf & mosquito  
proof mesh screen



2 x Large 90mm overflows  
(1 each end) + 1 cap



2 x 25mm outlets  
(1 each end) + 1 plug



Door to conceal pump



Pump installed with rain/  
mains changeover (sits  
behind door)



Flexible hoses for quick  
connection

370 watt pump(single storey) or 550 watt pump(multi storey)



→ Overflows & outlets are fitted  
on both ends to suit any set up

# Large Tanks 9,000-50,000ltr

ALL TANKS ARE CERTIFIED TO THE RAINWATER TANK STANDARD AS/NZS4766:2006



## CERTIFIED

- Self-supporting roof design means no support poles are necessary
- Extra thick walls for maximum strength
- One-piece construction means there are no joins, seams or part-lines
- Specially formulated double strength UV+ resin on the complete colour range ensures ultimate protection against Australia's harsh sun
- Free delivery on 13,600Ltr - 50,000Ltr Tanks\* - see pg.83
- RWT range available in 22 Colorbond® colours
- PCR range available in 12 Standard Colorbond® colours - Other colours available on request at 5% surcharge

Pages 10-17  
**SMALL TANKS**

Page 11  
**WATERGUARD TANKS**

Pages 18-19  
**COLOUR RANGE**

Pages 82-83  
**DELIVERY & INSTALLATION**

ONLINE WATER CALCULATOR

CALCULATOR.  
POLYMASTER.COM.AU



WHY CHOOSE POLYMASTER?  
SEE PG.4



## RWT - RAINWATER TANKS (CORRUGATED & SMOOTH WALL)

CODE	LITRES	DIAMETER	INLET HEIGHT	OVERALL HEIGHT	STRAINER (POSITION, SIZE)	OVERFLOW (ALTERNATIVE)	OUTLET (Std) (POSITION, SIZE)
RWT9000	9,000 (2,378gal)	2500 mm (8'2")	2050 mm (6'9")	2260 mm (7'5")	12, 400 mm	11.30/2.30/5.30/8.30	6, 40 mm
RWT13600	13,600 (3,000gal)	3100 mm (10'2")	2100 mm (6'11")	2450 mm (8')	12, 400 mm	11 / 2 / 5 / 8	4, 40 mm
RWT22500	22,500 (5,000gal)	3560 mm (11'8")	2470 mm (8'1")	2800 mm (9'2")	12, 400 mm	11.30/2.30/5.30/8.30	4, 40 mm
RWT31700	31,700 (7,000gal)	4100 mm (13'5")	2610 mm (8'7")	3040 mm (9'11")	12, 400 mm	11.30/2.30/5.30/8.30	4, 40 mm
RWT50KL	50,000 (11,000gal)	4600 mm (15'1")	3290 mm (10'10")	3440 mm (11'03")	12 / 6, 500 mm	2 / 4 / 6 / 8 / 10 / 12	4, 40 mm

## AVAILABLE IN WATERGUARD

- New technology to keep your water fresher for longer.

CODE: WGRWT9000

\* Refer to the RWT codes above for tank dimensions



- See pg.11 for Waterguard info.


## PCR - RAINWATER TANKS (SMOOTH WALL)

CODE	LITRES	DIAMETER	INLET HEIGHT	OVERALL HEIGHT	STRAINER (POSITION, SIZE)	OVERFLOW (ALTERNATIVE)	OUTLET (Std) (POSITION, SIZE)
PCR10000	10,000 (2,200gal)	2480 mm (8'1")	2170 mm (7'1")	2350 mm (7'7")	12, 400 mm	10.30/1.30/4.30/7.30	6, 40 mm
PCR13500	13,500 (3,000gal)	2830 mm (9'3")	2470 mm (8'1")	2630 mm (8'6")	12, 500 mm	10.30/1.30/4.30/7.30	6, 40 mm
PCR22500	22,500 (5,000gal)	3573 mm (11'8")	2559 mm (8'4")	2879 mm (9'4")	12, 500 mm	10.30/1.30/4.30/7.30	6, 40 mm
PCR27000	27,000 (6,000gal)	3573 mm (11'8")	3019 mm (9'10")	3339 mm (11')	12, 500 mm	10.30/1.30/4.30/7.30	6, 40 mm


## TANK ROOF DIAGRAM FOR FITTING POSITIONS

Please see table and diagram to choose your preferred overflow and outlet positions.

Brass outlets can be placed anywhere on flat skirt of tank.

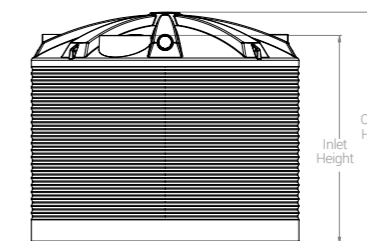

## FIT-OUT CLOCK

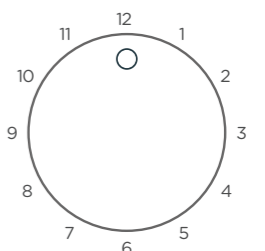

\* Refer to table for strainer, overflow & outlet positions available for each tank size

## ROUND TANK STANDARD FITTINGS



Mosquito proof leaf screen

Moulded lugs for easy lifting and tie-down points

90 mm Overflow fitting



Solid Brass Threaded Outlet & 40mm Ball Valve [RWT Range]

or



Solid Brass Threaded Outlet [PCR Range]

\* Additional sizes available

All measurements are approximate due to variable shrinkage during manufacture. Due to pigment variations with raw material manufacturers, colour shades may vary. Polymaster takes no responsibility for the quality of water held in a tank. \*Free delivery only applies to some regions and tank sizes.

# Pipeline Tanks

## DEPENDABLE AND PROVEN PACKAGES

These tank packages are designed to be connected to pipelines for stock and domestic water supply.




PIPEWORK FOR ILLUSTRATION PURPOSES ONLY

### QUALITY CERTIFIED


Polymaster Pipeline Tanks are fully certified and are supplied with Watermark approved brass float valves certified to AS1910, as recommended by pipeline authorities.




1 x 90mm overflow / breather & screen (not shown)

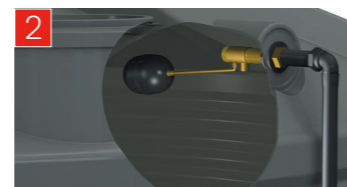

25mm fitting & WFFV1 float valve assembly adjacent inspection cover  
**MAX. PRESSURE 300KPA / 43PSI RATING**

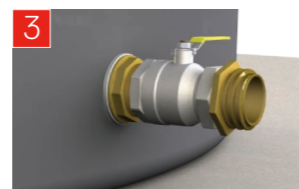

1 x 65mm CFA/CFS coupling

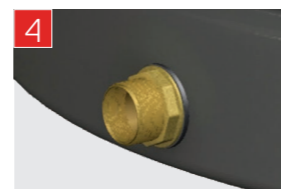

Additional 50mm outlet & ball valve


### POLYMASTER HAS BEEN SPECIALISING IN PIPELINE TANKS & TROUGHS SINCE 1994

SOME OF THE PIPELINES WE HAVE SERVICED:


- Normanville
- Broken Creek
- Tungumah
- Waranga Western
- Wimmera Mallee
- Goulburn Murray Water
- East Loddon
- Mitiamo
- Euston
- Wanganella

### STANDARD FITTINGS & LOCATIONS

- 12:00 Inspection cover
- 2:30 Overflow / Breather
- 4:00 50mm brass outlet & ball valve
- 8:00 CFA2 - CFA connection
- 11:30 Fitting & WFFV1 float valve



### OPTIONAL INTERNAL FIT OUT AVAILABLE

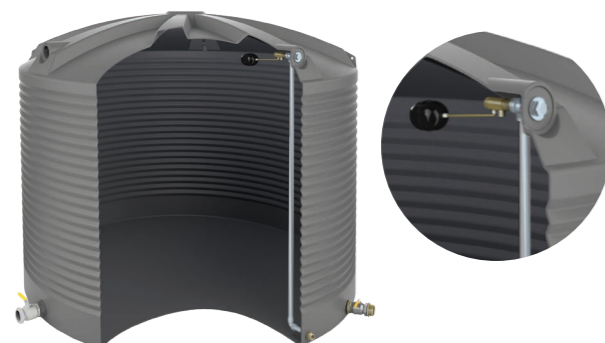

CODE	DESCRIPTION
PLT9000	9,000Ltr Corrugated Wall Pipeline Tank
PLT13600	13,600Ltr Corrugated Wall Pipeline Tank
PLT22500	22,500Ltr Corrugated Wall Pipeline Tank
PLT31700	31,700Ltr Corrugated Wall Pipeline Tank
PLT50KL	50,000Ltr Smooth Wall Pipeline Tank
PLTPC22500*	22,500Ltr Smooth Wall Pipeline Tank (15 YEAR WARRANTY)
PLTPC27000*	27,000Ltr Smooth Wall Pipeline Tank (15 YEAR WARRANTY)

# Molasses Tanks



### EXTRA HEAVY DUTY CONSTRUCTION TO SUIT LIQUIDS WITH A SPECIFIC GRAVITY OF UP TO 1.5SG

- Extra heavy wall thickness
- Ideal for heavy liquids up to 1.5SG
- Standard with 80 mm brass outlet and inspection cover
- Fitted with overflow as breather & screen

CODE	DESCRIPTION
MOL22500	22,500 ltr Corrugated Wall Molasses Tank
MOL31700	31,700 ltr Corrugated Wall Molasses Tank
MOL50KL	50,000 ltr Smooth Wall Molasses Tank

→ See pg.33 for molasses feeder / licker drum

See Fertiliser Tanks pg.37

### PIPELINE TANK & TROUGH APPLICATION - GRAVITY FEED

