



The pump is a self-priming surface mounted pressure system pump supplied with plug and play leads (IEC type). The self-priming ability provides excellent suction capacity of up to 9m. Used especially for supplying water to domestic applications

Model Number: ASC J48/65	
Item Number: 809466	
Pump Data	
Pressure Rating:	4.8 bar 480kPa
Min. fluid temp:	2° C
Max. fluid temp:	40° C
Max. operating temperature:	40° C

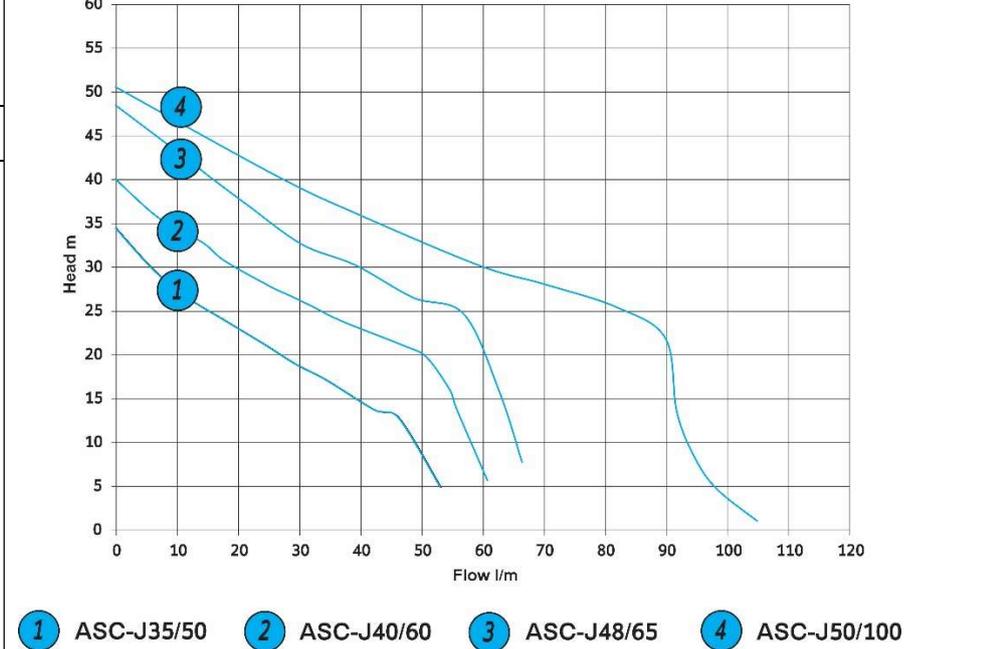

Max Flow Rate:	68LT/min
Max Head:	48m
Fluid:	Water, pure
Density:	998.3 kg/m ³

Materials	
Pump Body:	304 Stainless
Support:	Cast Aluminium
Motor Body:	Cast Aluminium
Mechanical Seal:	Carbon / Ceramic
Jet / Venturi:	Polypropylene
Impeller:	Polypropylene
O Ring:	Nitrile
Power Cable:	1.2m H05

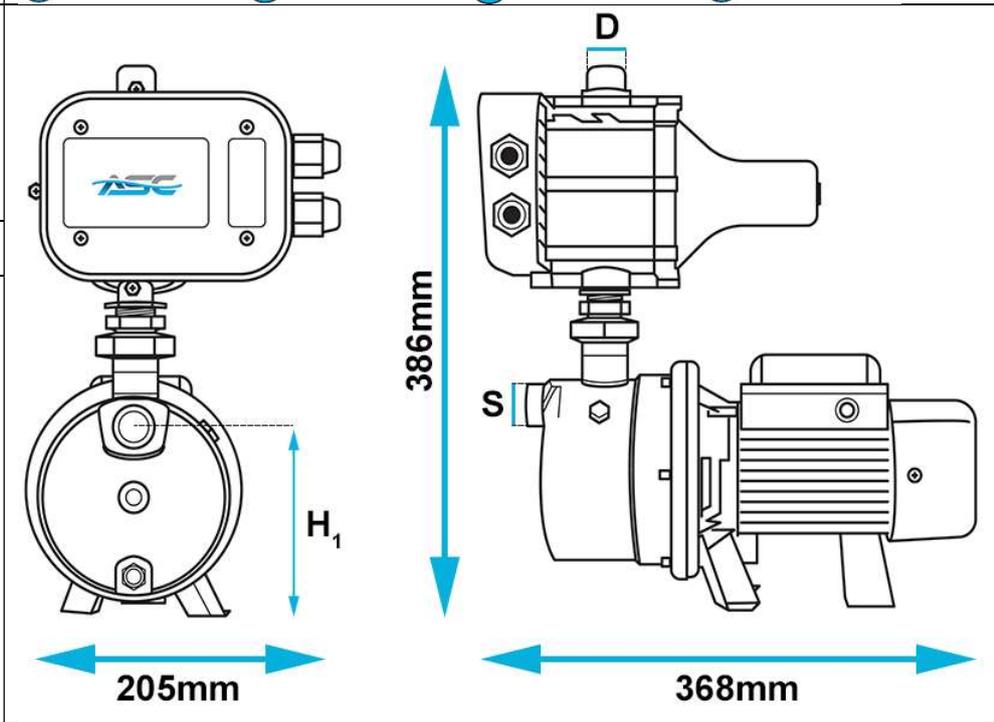

Electrical Data		Dimensions (mm)			
Phase:	Single Phase 1ø	A (length)	368mm	S	25mm
Rated Voltage:	220-230V ~	B (width)	205mm	D	25mm
		H (height)	386mm		
		H ₁ (centre)	145mm		

Mains Frequency:	50Hz	Boxed Weight: Pump Weight:	11.34kg 13.20kg
P2 (kW):	750W		
HP:	1.0 hp		
Current:	3.26A		
Capacitor:	20μF		
VL:	450V		
Motor Duty:	Continuous		
Motor Type:	Asynchronous		
Ingress Protection:	TEFC		
Insulation Class:	IP X4		
Motor Protection:	B In-built thermal overload		

ASC Water Tanks reserves the right to make modifications without notice.