GRUNDFOS

Company name:	ASC Water Tanks
Created by:	Anant Yuvarajah
Phone:	03 8795 7715
Email:	sales@asctanks.com.au
Date:	13/06/2024

Qty.	Description
1	**UPS 32-80 N 180**

Note! Product picture may differ from actual product

Product No.: 95906448

The pump is of the canned rotor type, i.e. pump and motor form an integral unit without shaft seal and with only two gaskets for sealing.
The bearings are lubricatd by the pumped liquid.
The pump has 3-step speed selector.
The pump is characterized by:

* Ceramic shaft and radial bearings.
* Carbon axial bearing.
* Stainless steel rotor can and bearing plate.
* Corrosion-resistant impeller, Composite.
* Stainless steel pump housing.

The motor is a 1-phase motor.
No additional motor protection is required.

Liquid:	
Pumped liquid:	Water
Liquid temperature range:	-25 .. 110 °C
Selected liquid temperature:	60 °C
Density:	983.2 kg/m³
Technical:	
Rated flow:	5.12 m³/h
Rated head:	5.2 m
TF class:	110
Approvals:	AAA,CE,EAC,WEEE,RCM
Materials:	
Pump housing:	Stainless steel EN 1.4308 AISI 304
Impeller:	Composite PES+30% GF
Installation:	
Range of ambient temperature:	0 .. 40 °C
Amb. max at 80 dgr C liquid:	40 °C
Maximum operating pressure:	10 bar
Type of connection:	G
Size of connection:	2 inch
Pressure rating for connection:	PN 10
Port-to-port length:	180 mm
Electrical data:	
Power input in speed 1:	135 W

GRUNDFOS

Company name:	ASC Water Tanks
Created by:	Anant Yuvarajah
Phone:	03 8795 7715
Email:	sales@asctanks.com.au
Date:	13/06/2024

Qty.	Description	
1	Power input in speed 2:	200 W
	Max. power input:	220 W
	Mains frequency:	50 Hz
	Rated voltage:	1 x 230 V
	Current in speed 1:	0.6 A
	Current in speed 2:	0.9 A
	Current in speed 3:	0.98 A
	Capacitor size - run:	4 µF
	Enclosure class (IEC 34-5):	X2D
	Insulation class (IEC 85):	F
	Built-in motor protection:	CONTACT
	Others:	
	Terminal box position:	9H
	Net weight:	4.8 kg
	Gross weight:	5.08 kg
	Shipping volume:	0.008 m³
	Danish VVS No.:	380648100
	Swedish RSK No.:	5803139
	Finnish LVI No.:	4615612
	Country of origin:	RS
	Custom tariff no.:	84137090622081967

Company name:	ASC Water Tanks
Created by:	Anant Yuvarajah
Phone:	03 8795 7715
Email:	sales@asctanks.com.au
Date:	13/06/2024

95906448 UPS 32-80 N 180 50 Hz

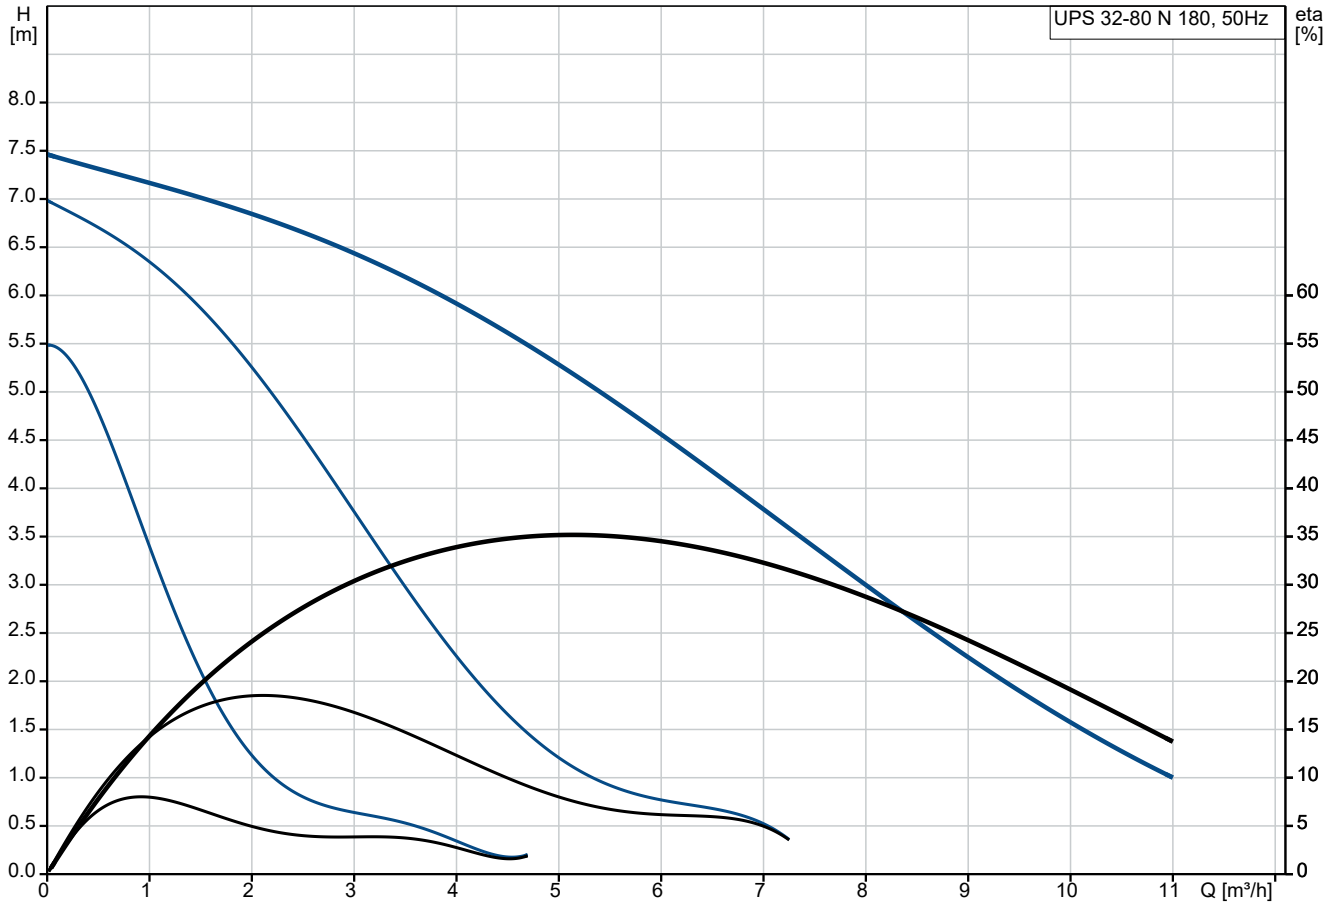

Pumped liquid = Water
Liquid temperature during operation = 60 °C
Density = 983.2 kg/m³

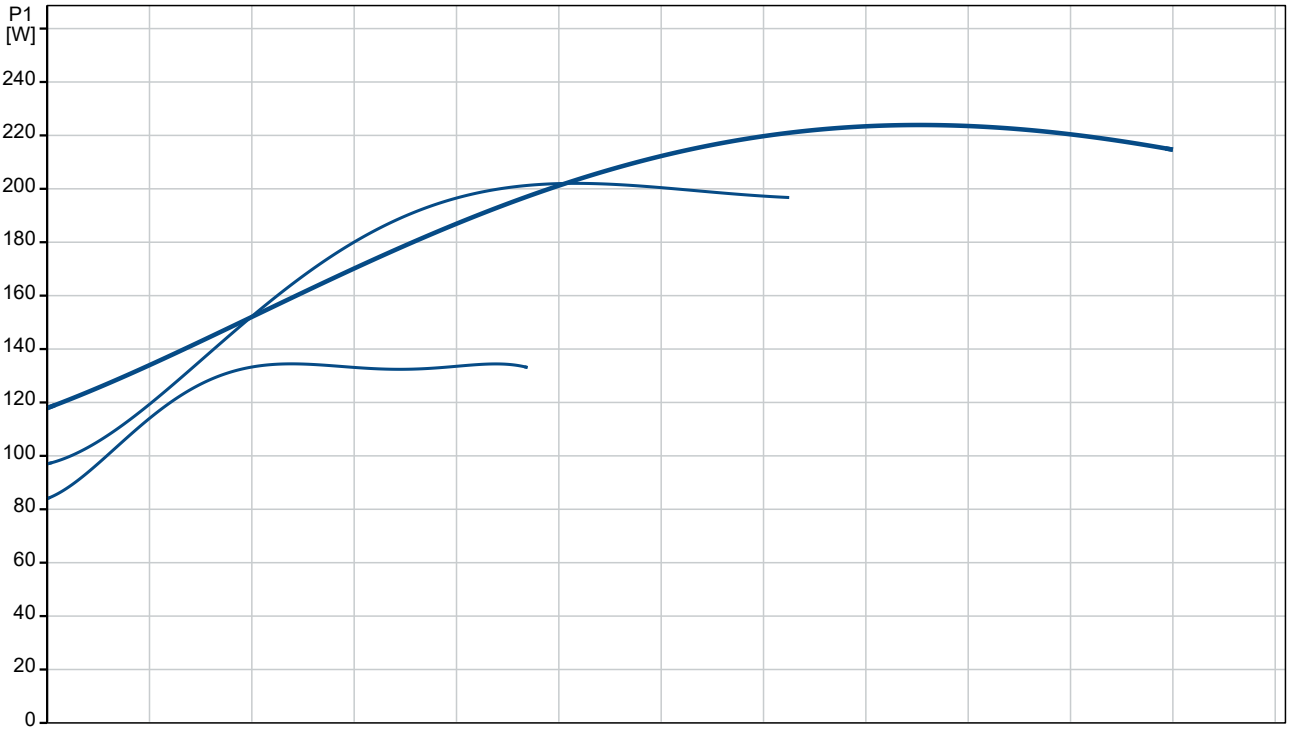

GRUNDFOS

Company name: ASC Water Tanks
Created by: Anant Yuvarajah
Phone: 03 8795 7715
Email: sales@asctanks.com.au

Date: 13/06/2024

Description	Value
General information:	
Product name:	UPS 32-80 N 180
Product No:	95906448
EAN number:	5700310353869
Price:	AUD 1649
Technical:	
Speed no:	3
Rated flow:	5.12 m³/h
Rated head:	5.2 m
Maximum head:	80 dm
TF class:	110
Approvals:	AAA,CE,EAC,WEEE,RCM
Materials:	
Pump housing:	Stainless steel
Pump housing:	EN 1.4308
Pump housing:	AISI 304
Impeller:	Composite
Impeller:	PES+30% GF
Installation:	
Range of ambient temperature:	0 .. 40 °C
Amb. max at 80 dgr C liquid:	40 °C
Maximum operating pressure:	10 bar
Type of connection:	G
Size of connection:	2 inch
Pressure rating for connection:	PN 10
Port-to-port length:	180 mm
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	-25 .. 110 °C
Selected liquid temperature:	60 °C
Density:	983.2 kg/m³
Electrical data:	
Power input in speed 1:	135 W
Power input in speed 2:	200 W
Max. power input:	220 W
Mains frequency:	50 Hz
Rated voltage:	1 x 230 V
Current in speed 1:	0.6 A
Current in speed 2:	0.9 A
Current in speed 3:	0.98 A
Capacitor size - run:	4 µF
Enclosure class (IEC 34-5):	X2D
Insulation class (IEC 85):	F
Built-in motor protection:	CONTACT
Thermal protec:	INT.
Others:	
Terminal box position:	9H
Net weight:	4.8 kg
Gross weight:	5.08 kg
Shipping volume:	0.008 m³
Danish VVS No.:	380648100
Swedish RSK No.:	5803139
Finnish LVI No.:	4615612
Country of origin:	RS
Custom tariff no.:	84137090622081967

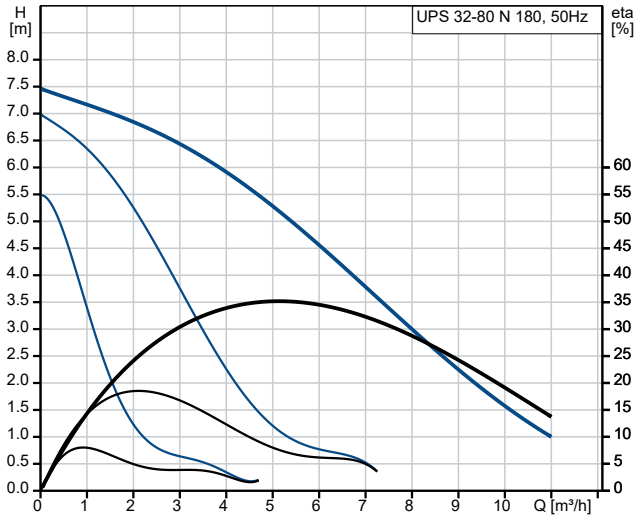

Pumped liquid = Water
Liquid temperature during operation = 60 °C
Density = 983.2 kg/m³

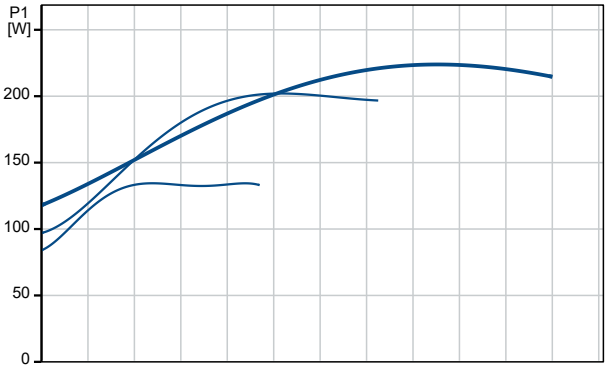

Company name:	ASC Water Tanks
Created by:	Anant Yuvarajah
Phone:	03 8795 7715
Email:	sales@asctanks.com.au
Date:	13/06/2024

95906448 UPS 32-80 N 180 50 Hz

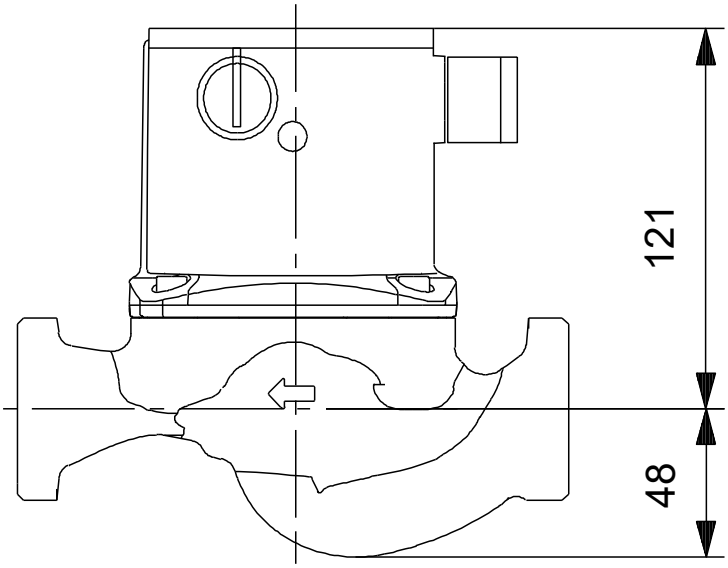

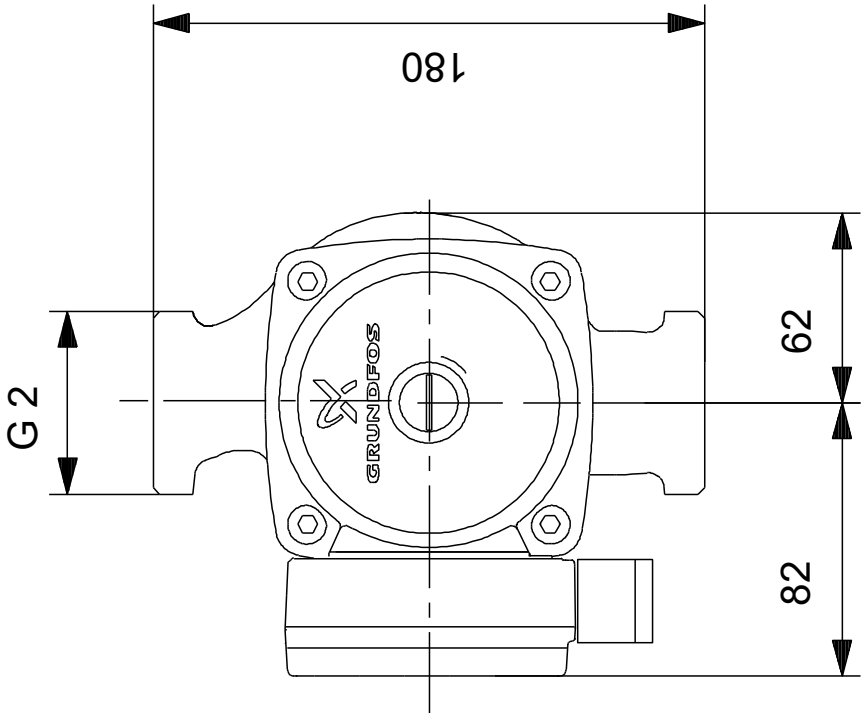

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.