

## MULTISTAGE SUBMERSIBLE PRESSURE PUMP

### RSME SERIES



The REEFE multistage pump features a superior construction that is lightweight for ease of installation. Designed to deliver maximum pressure and highly efficient performance, ideal for domestic and commercial applications. Industrial Grade Induction Motors are backed by 2 year warranty.

#### APPLICATIONS


- Clean water transfer
- Rainwater supply - when integrated with controller
- Discharge of screened greywater

#### FEATURES & BENEFITS

- Heavy duty, reliable construction for greater longevity
- Highly versatile, suitable for horizontal and vertical installation
- Max Immersion up to 17m
- Lightweight construction for easy installation and maintenance
- Adjustable depth float switch
- 20m H07RN-F cable
- In built overload protection
- Electrical Safety Approval to AS/NZS 60335.2.41
- Max Water Temperature 35°C

#### CONSTRUCTION

- Stainless Steel AISI 304 pump body, motor, shaft and handle
- Reinforced polymer impellers & diffusers
- Alumina Graphite mechanical seal
- Carbon ceramic mechanical seal (RSME80 only)
- Stainless Steel 304 Impellers (RSME80 only)
- NOTE: The RSME80 Pump must be connected to a 15 Amp power outlet
- Ingress Protecting IP68
- Insulation Class F

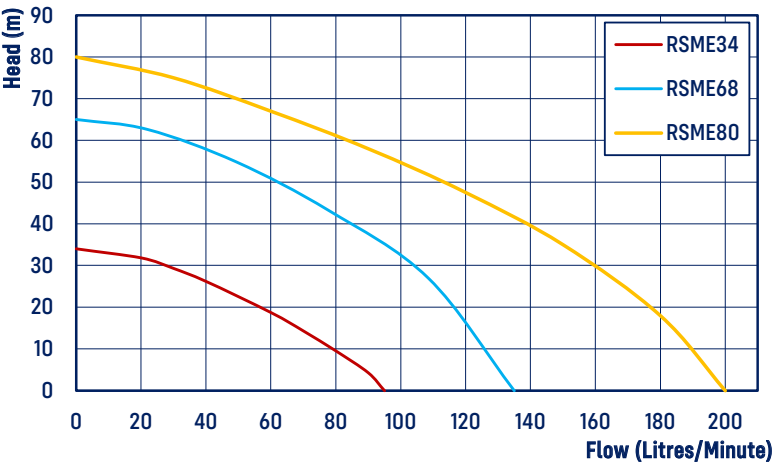

CODE	MODEL	POWER 240V				RATED		MAXIMUM		MAX IMMERSION DEPTH (M)	CABLE LENGTH (M)	OUTLET		SIZE DØ X H (MM)
		AMPS	P1 (kW)	P2 (kW)	HP	FLOW (L/MIN)	HEAD (M)	FLOW (L/MIN)	HEAD (M)			MM	IN	
21125	RSME34	4.2	0.95	0.55	0.75	48	23	95	34	17	20	25	1"	127x452
21149	RSME68	8.5	1.8	1.2	1.6	67.5	49	135	65	17	20	32	1 ¼"	127x649
21132	RSME80	12.5	2.6	2.2	3	100	49.3	200	77	17	20	40	1 ½"	152x561